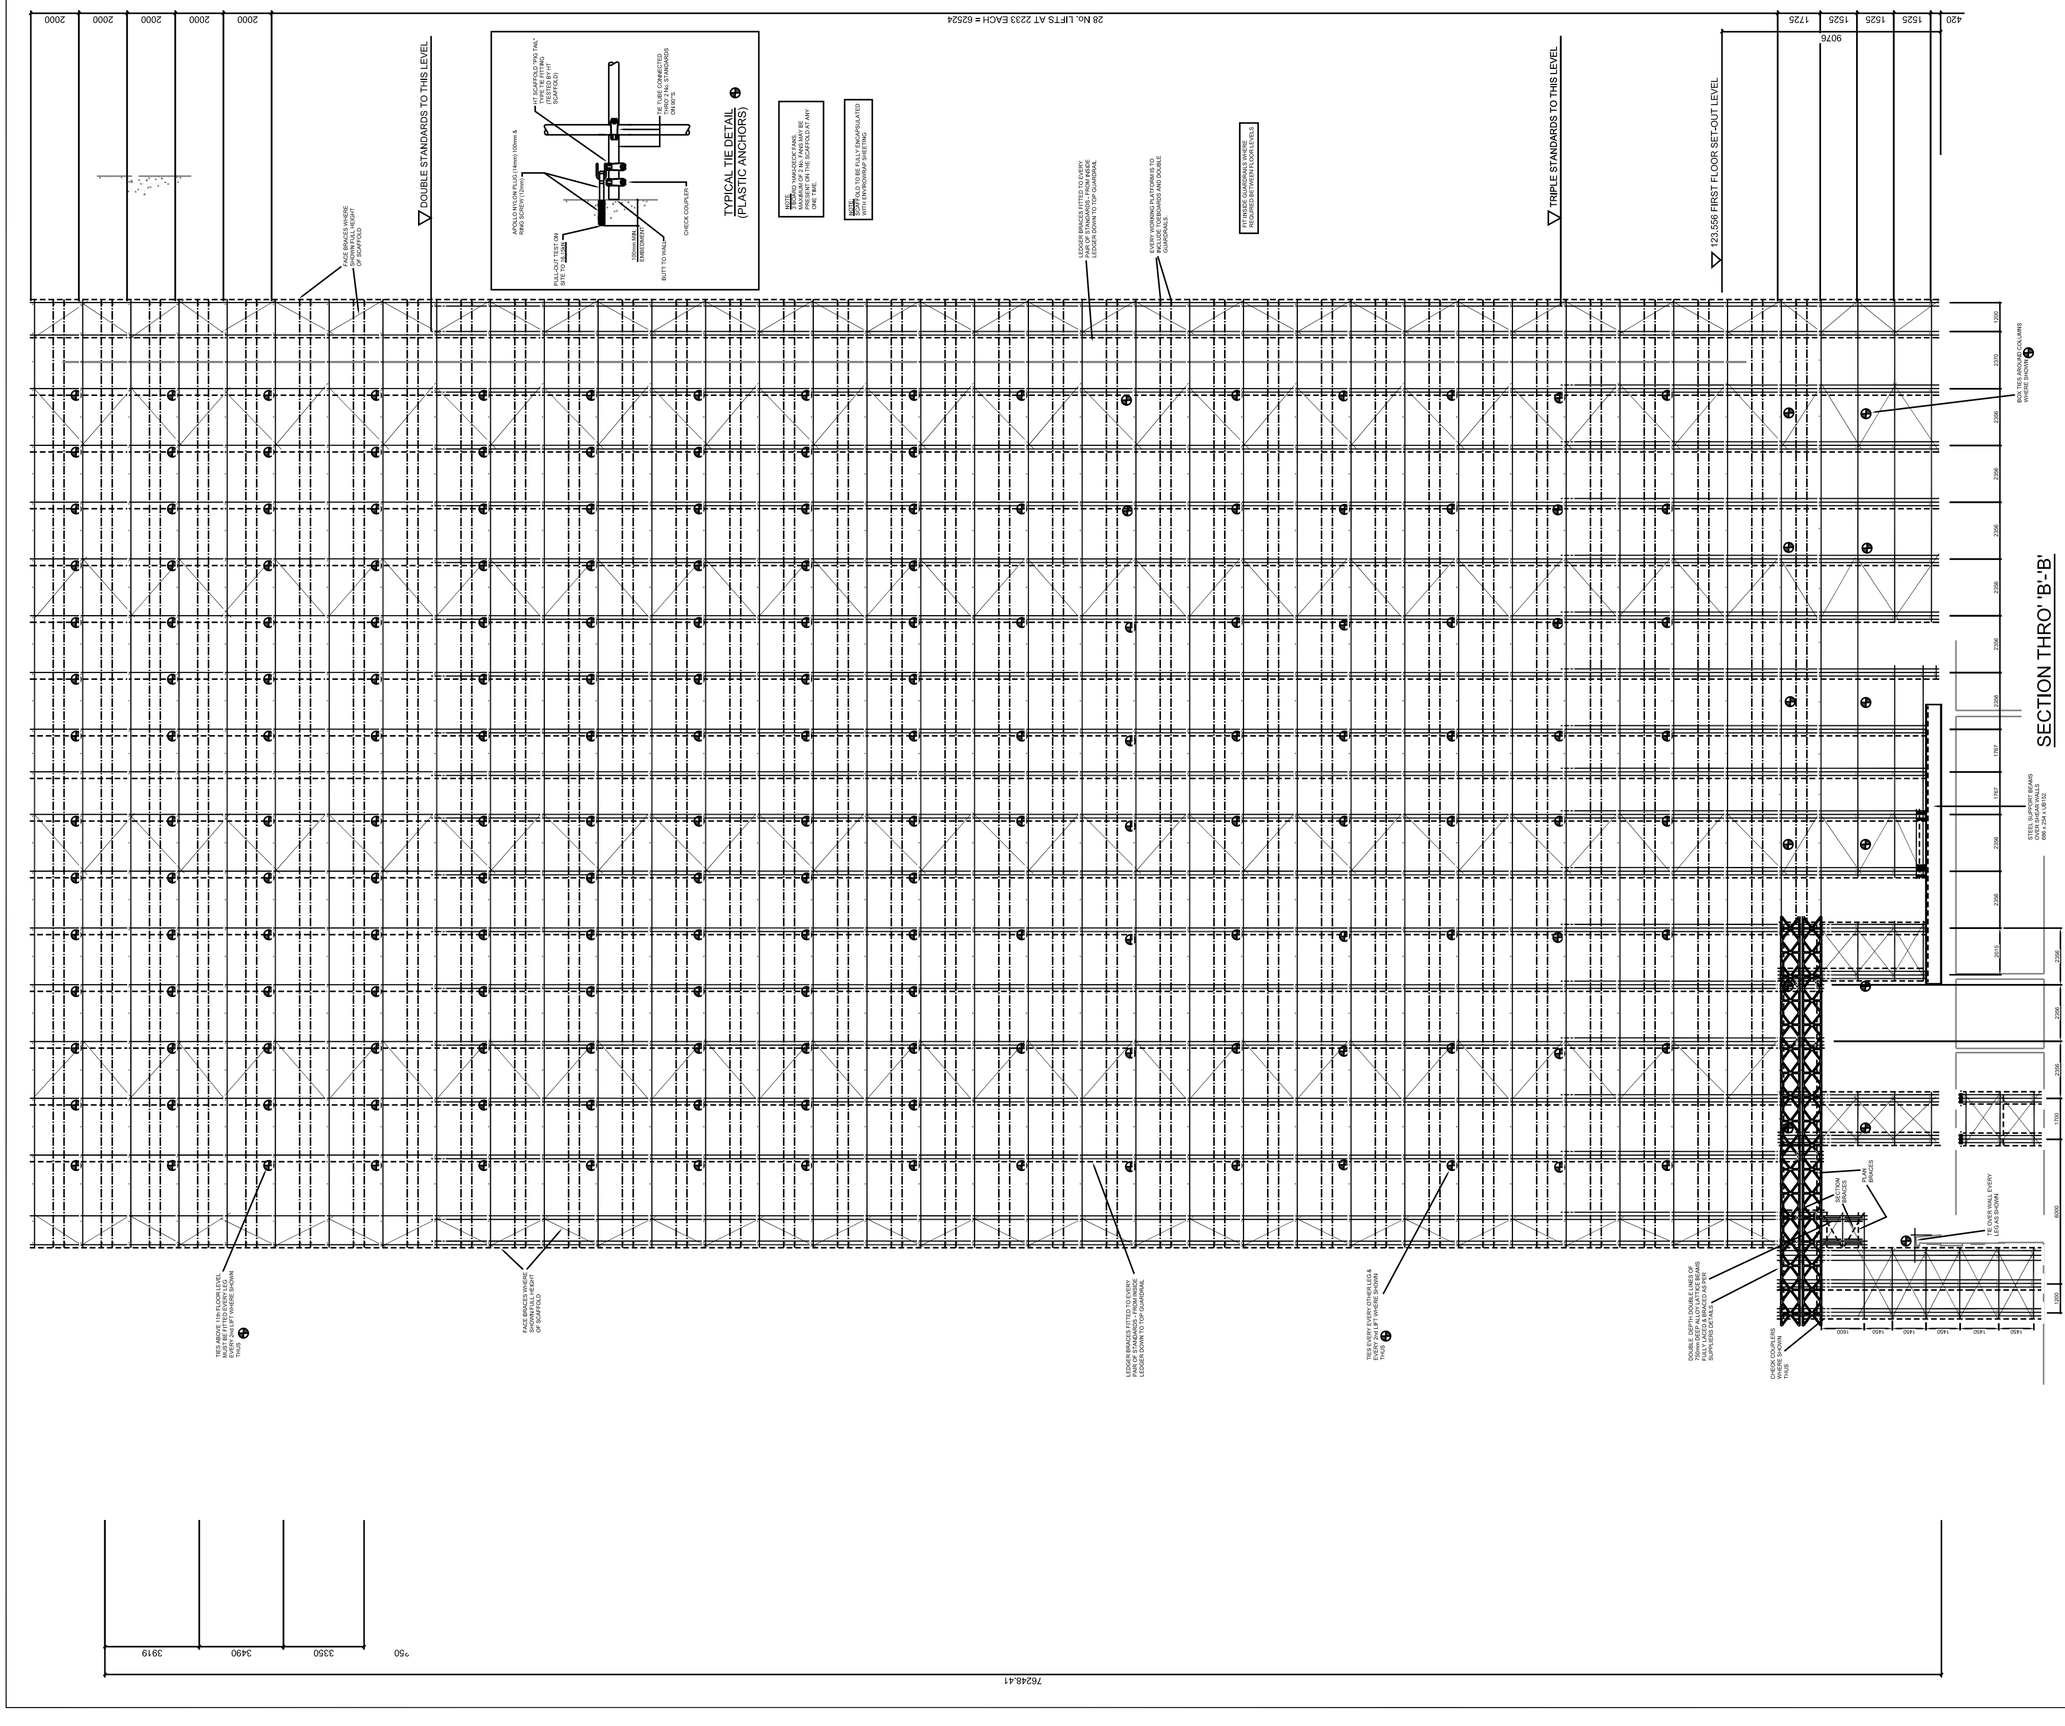
28 No. LIFTS AT 2233 EACH = 62524
2000
2000
2000
2000
2000
DOUBLE STANDARDS TO THIS LEVEL
TRIPLE STANDARDS TO THIS LEVEL
123.556 FIRST FLOOR SET-OUT LEVEL
420
1525
1525
1525
1725
907δ
TYPICAL TIE DETAIL (PLASTIC ANCHORS)
HT SCAFFOLD "PSL1 TAL" TYPE TIE FITTING (SWIVEL PART SCAFFOLD)
TIE TUBE CONNECTED UNDER 'A' No. STANDARDS ONLY
APOLLO NYLON PLUG (14mm) 100mm & RSA SCREW (10mm)
CHECK COUPLER
PULL-OUT TEST ON SITE TO 3kN
100mm MIN EMBEDMENT
BUTT TO WALL
NOTE STRONG HANDOVER TANKS WITH 1.2m HANDRAILS TO BE PRESENT ON THE SCAFFOLD AT ANY ONE TIME
NOTE SCAFFOLD TO BE FULLY ENCAPSULATED WITH ENVIRONSAFE SHEETING
LEDGER BRACES FITTED TO EVERY PAIR OF STANDARDS - FROM INSIDE LEDGERS DOWN TO GROUNDWORK
EVERY WORKING PLATFORM IS TO INCLUDE TOEBOARDS AND DOUBLE GUARDRAIL
FIT INNER GUARDRAILS WHERE REQUIRED BETWEEN FLOOR LEVELS
BUILT TIES AROUND COLUMNS WHERE SHOWN
STEEL SUPPORT BEAMS TO BE SUPPLIED BY OTHERS 686 x 254 x UB 152
SECTION THRO' 'B'-'B'
PLAN BRACES
SECTION BRACES
TIE OVER WALL EVERY 3.65 AS SHOWN
TIE GRAVITY LOCATION LEDGER MUST BE FITTED EVERY 2nd LIFT AND HELD AT EVERY 3rd BAY WHERE SHOWN THUS
FACE BRACES WHERE SHOWN FULL HEIGHT OF SCAFFOLD
LEDGER BRACED LITTED EVERY PAIR OF STANDARDS FROM INSIDE LEDGERS DOWN TO TOP GUARDRAIL
TIES EVERY EVERY OTHER LIFT & EVERY 4th BAY WHERE SHOWN THUS
DOUBLE DEPTH DOUBLES LINES OF SCAFFOLD AT EVERY 3rd BAY AND FULLY LACED & BRACED AS PER RAKING DOUBLE SCAFFOLD DETAIL
OVER/N COUPLERS WHERE SHOWN THUS
1650
1650
1650
1650
1650
1650
2250
2250
2250
2250
2250
2250
2250
2250
1700
1700
6000
2250
2250
2250
2250
2250
2250
2250
2250